

# MAGNUM OIL TOOLS INTERNATIONAL


## Magnum Mill-EZ Pump-Down Composite Bridge Plug

### Description:

The "**MAGNUM MILL-EZ™ PUMP-DOWN**" is a patented slim design Composite Bridge Plug. This plug is equipped with a lower wiper connection on the bottom of the plug that enables the wireline, guns, CCL, plug and other BHA's to be pumped, in horizontal applications, to its desired depth. This tool is then set like a conventional bridge plug. Because of its low metallic content the "**MAGNUM MILL-EZ™ PUMP-DOWN**" can be quickly and easily milled and circulated back to surface. The patented bottom allows for easy milling of several plugs in the same well bore. This may be accomplished with conventional milling or drilling with a rig and tubing or with coiled tubing.

### Features:

- Can be pumped to depth at 3 to 5 barrels/min
- Designed to be set in horizontal wells on wireline
- Eliminates the need for coil tubing and tubing conveyance of the plug
- Utilizes conventional setting tools
- Mill or drill multiple plugs in a single trip
- Can be milled or drilled with coil tubing
- Utilize conventional milling or drilling tools
- Extremely fast milling or drilling operation
- High differential pressure rating
- Patented wash-thru plug shoe to aid in milling multiple plugs
- All Mill-EZ Plugs can be simply equipped on location with the Pump-Down kit
- Custom Plug O.D. available upon request

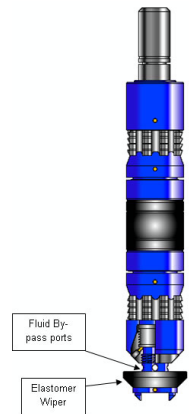

### Specifications: (Inches & Fahrenheit)

PART NUMBER ("X" DENOTES PRESSURE AND TEMP OF PLUG G,Y, OR B)	CASING O.D	WEIGHT	Bridge Plug O.D	Bridge Plug Length	LOW Temp. & LOW PSI. GREY	LOW Temp. & HIGH PSI. YELLOW	HIGH Temp. & HIGH PSI. BLUE	Recommended Setting Tool
Magnum Mill-EZ Composite Plugs can be converted into Pump-Down plugs by simply adding the Pump-Down Kit. 05.CPDK.XXX.9999 (X Denotes the casing size)	3 1/2"	9.30-10.20	2.725	11.0		250° / 10K	400° / 10K	Baker #5 or GO
	3 1/2"HW	12.95	2.50	11.0		250° / 10K	400° / 10K	Baker #5 or GO
	4"	9.50-11.00	3.188	16.0	250° / 8K	250° / 10K	400° / 10K	Baker #10 or GO
	4 1/2"	9.50-15.10	3.60	16.0	250° / 8K	250° / 10K	400° / 10K	Baker #10 or GO
	5"	11.50-18.00	3.92	16.0	250° / 8K	250° / 10K	400° / 10K	Baker #10 or GO
	5 1/2"	15.50-23.00	4.40	16.0	250° / 8K	250° / 10K	400° / 10K	Baker #20 or GO
	7"	20.00-32.00	5.75	18.0	250° / 8K	250° / 10K	400° / 10K	Baker #20 or GO
	7 5/8"	24.00-33.70	6.40	18.0			400° / 10K	Baker #20 or GO